


PLAN VIEW

NOTES:

1. Install silt fence or tree protection fence adjacent to construction entrance to direct vehicles to drive on stone.
2. If mud is not removed from the vehicles traveling over the stone, then the tires of the vehicles should be washed before entering the public road or the construction entrance must be lengthened. Sweep streets immediately if mud is tracked offsite onto public roads.
3. Maintain construction entrance in a condition to prevent mud or sediment from leaving the site. Entrance will require periodic removal of sediment-laden stone and replacement with fresh stone. Immediately remove all mud/sediment/rock tracked off the lot.

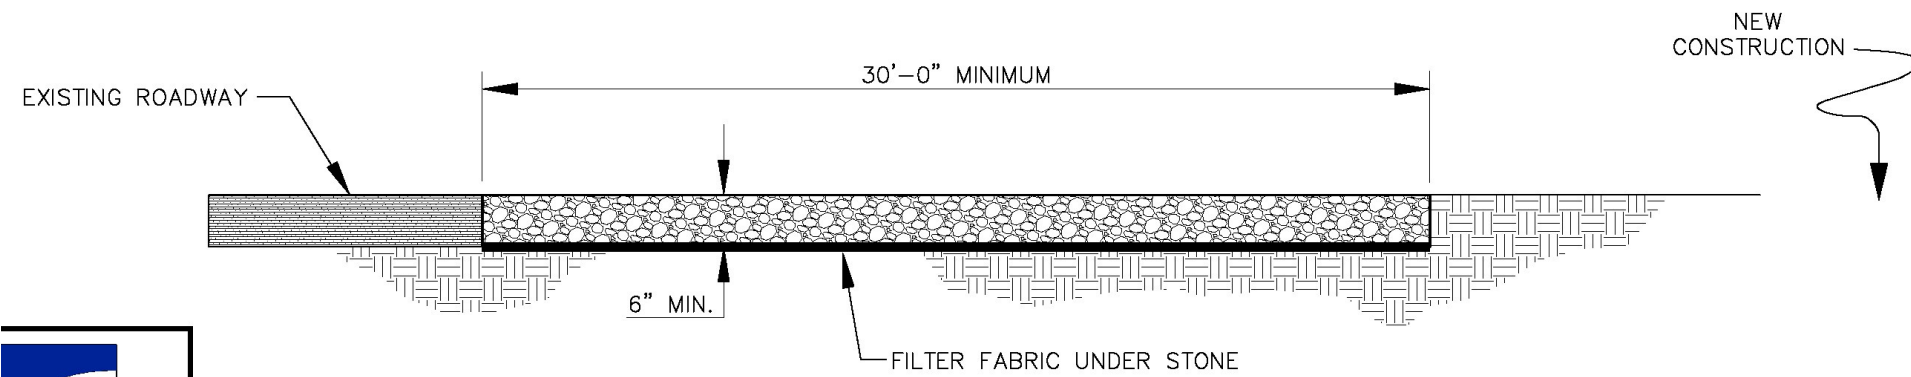

CROSS SECTION