


S 9.5 B -1 1/2" MIN. FOR PAVEMENT REPLACEMENT OR AS DIRECTED BY THE ENGINEER. TYPE RS- 1H TACK COAT TO BE APPLIED AT THE RATE OF 0.08 GALLONS PER SQ. YD. ALONG EDGES OF EXISTING PAVEMENT & NEW BASE COURSE PRIOR TO REPLACEMENT OF SURFACE COURSE.

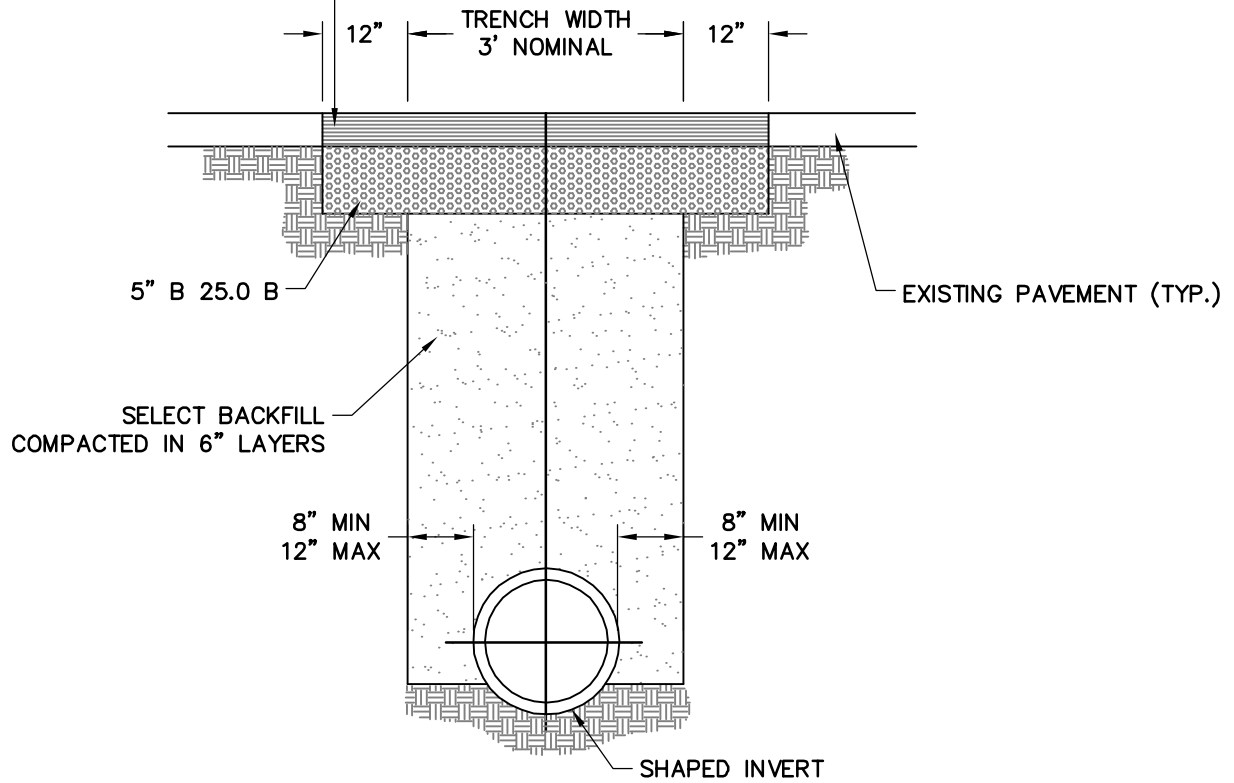

**NOTES:**

1. MINIMUM PAVEMENT REPLACEMENT REQUIREMENTS FOR TOWN STREETS AS SHOWN.
2. USE OF PAVEMENT REPLACEMENT (AS SHOWN HEREON) ON STATE ROADS SUBJECT TO N.C.D.O.T. APPROVAL.
3. REPAIR PAVEMENT MARKINGS WITH SIMILAR MATERIAL.

REVISIONS	
DATE	DESCRIPTION

TOWN OF KNIGHTDALE STANDARD DETAILS	ASPHALT PAVEMENT REPAIR SECTION	STD. NO.
		3.14