


Attachment A: Town of Knightdale SCM Safety Sign Standard Detail 1.02- Sign Support

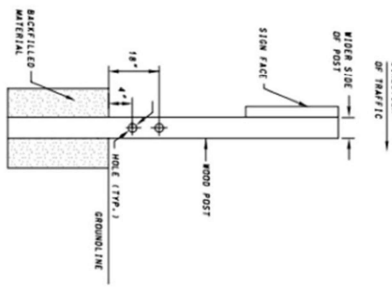

POST HOLE DIA. SIZE (IN.)	MODIFICATION
4" x 4"	1
4" x 6"	2
6" x 6"	3

NOTES:

1. ALL WOOD POSTS LARGER THAN 4" x 4" SHALL BE TREATED WITH PRESERVATIVE AND SHALL BE SET IN A HOLE CENTERED AT 4" AND 18" ABOVE THE GROUNDLINE AND PERPENDICULAR TO THE ROADWAY.
2. THE HOLE SHALL BE BACKFILLED UNLESS INDICATED.


TYPICAL FOUNDATION FOR WOOD SUPPORTS

WOOD POST MODIFICATIONS FOR BREAKAWAY FEATURE

NOTE:

TREATED WOODEN POST SHALL BE PLACED IN HOLE WITH SURFACE OF WOOD ENDING USING SURFILL MATERIAL AND TAMPED THOROUGHLY TO PROVIDE A RIGID SUB-SURFACE CONDITION AROUND THE POST.

WOOD POST MODIFICATIONS FOR BREAKAWAY FEATURE

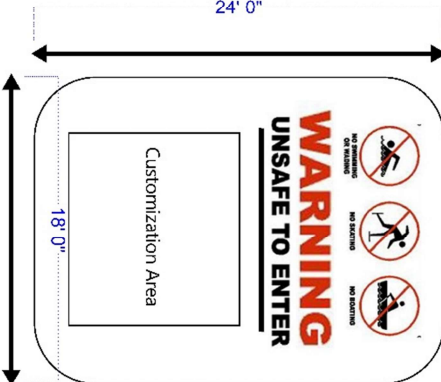

WOOD POST MODIFICATIONS FOR BREAKAWAY FEATURE

Signs should be installed on 4" x 4" (min.) treated wooden post in a conspicuous location.

Signs should have an aluminum backing material

Signs should contain the above symbols as applicable

Signs should always include the following additional information:

- Name of Owner/Party responsible for maintenance
- Owner/Responsible party contact telephone
- Knightdale Stormwater Hotline Telephone: 919-217-2255

Owner/Responsible Party may submit custom signage for approval.

Signs must be properly maintained to ensure all graphics stay legible.

WOOD POST MODIFICATIONS FOR BREAKAWAY FEATURE

1.02 SCM Identification Sign

Stormwater Control Measure Signage Detail

Working Title: N/A

Date: 11-03-2020

Drawn: PB

Scale: 1:1

TOWN OF KNIGHTDALE STANDARD DETAILS

